



KENSINGTON TRIMS

PREMIUM FLOORING TRIMS




**BRUSHED
BLACK**




**BRUSHED
GOLD**



**BRUSHED
IRON GREY**



MATT



BRUSHED




POLISHED

SQUASH Z BAR

Compressible 16mm Z Bar with self adhesive tape on the hard flooring side.

NB. Drawings not to scale.

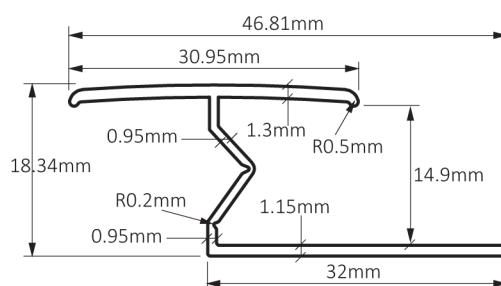

PRODUCT DATA

Material:

Aluminium 6063-T5

Alloying elements:

Si (0.2-0.6%), Mg (0.45-0.9%), with the remainder being Al and trace impurities.

Mechanical properties:

Tensile strength (b) for 6063-T5: ≥ 160 MPa
Yield strength (0.2) for 6063-T5: ≥ 110 MPa
Elongation (): $\geq 8\%$
Hardness: 6063-T5 ≥ 8 HW (Wehb hardness)

Environmental performance:

Corrosion resistance:

Salt spray test (NSS) – anodized film ≥ 500 hours without corrosion

Surface treatment film thickness (anodizing):

AA15 (film thickness ≥ 15 μm)

Weather resistance:

UV aging test (QUV) – 500 hours

Surface treatment:

Anodizing

Lengths available:

900mm, 2700mm



Contact us:

0161 790 7850

info@kensingtontrims.com

www.kensingtontrims.com

289 Chaddock Lane, Worsley, Manchester, M28 1DU